



antípoda[®]

engineered to your needs


Slat-Band conveyors

Features

- Suitable for a large range of products/ packages, gabarits
- Wide range of belt types
- Direct or chain drive/Head or center drive
- Transport speed adjustment (possible)
- With or without electrical installation
- Adjustable side rails (optional)
- Auxiliar turn disc for small radius (possible)


Beneficts

- Detailed design to specifications
- Strong and robust construction
- Standarized components
- Low cost maintenance
- Modular and adjustable solutions
- Easy and safe operation
- Just in time delivery
- Value for Money, made in EU to CE Standards

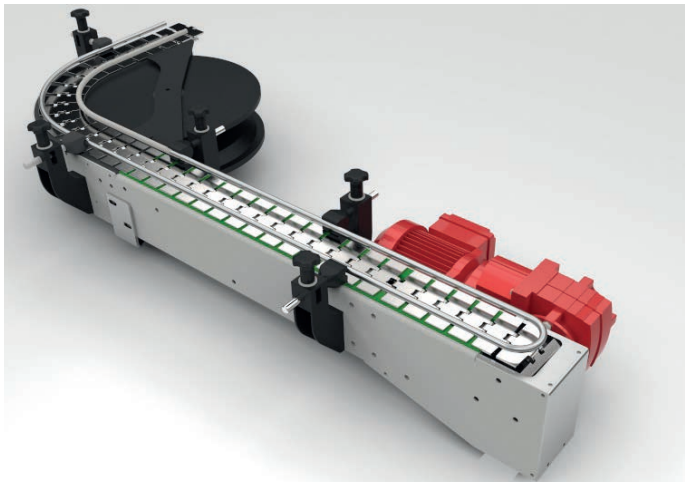

plug & play

Ready for installation and use
Easy and flexible mounting

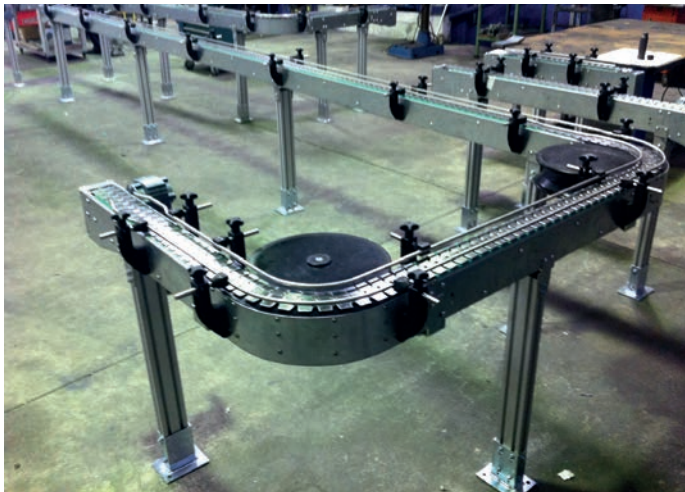

Slat-Band Conveyors

Technical Data

General technical data

máx. load capacity	250 kg/m
max. total load capacity	100 kg
conveyor speed	0,10 to 0,50 m/s
position	inclined, horizontal, declined
ambient temperature	-5 to +50° C

Materials

structure	steel, stainless steel, aluminium
slider bed	PE
sprockets	stainless steel, acetal, PP
slat-band	acetal, PP, PE

Drive

rated voltage	230 V/50 Hz/1 phase 400 V/50 Hz/3 phase
max. electrical power	3,00 kW
bearings	floating ball bearings
type	direct or chain
position	head or center

Dimensions

length (L)	500 to 6000
width (S)	please contact
profile height (H)	150, 200 mm



Please contact for other specifications
Please check the support stands and side guides options

